

MotoM

姿図




品番	GCL020W-N
光源	LED
定格光束	675lm
1/2 照度角	115°
ビーム角	115.4°

器具効率 100%	上方光束 0%	下方光束 100%	保守率 100%
-----------	---------	-----------	----------

照明率表

反射率	天井	70%						50%						30%						0%	
		50%		30%		10%		50%		30%		10%		50%		30%		10%		0%	
		壁	床	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%
0.6	0.46	0.44	0.38	0.37	0.32	0.32	0.45	0.43	0.37	0.36	0.32	0.31	0.43	0.42	0.36	0.36	0.31	0.31	0.29		
0.8	0.57	0.53	0.47	0.46	0.41	0.40	0.54	0.52	0.46	0.45	0.41	0.40	0.53	0.51	0.45	0.44	0.40	0.40	0.37		
1.0	0.65	0.61	0.56	0.53	0.49	0.48	0.62	0.59	0.54	0.52	0.48	0.47	0.60	0.58	0.53	0.52	0.48	0.47	0.45		
1.25	0.73	0.68	0.64	0.61	0.57	0.55	0.70	0.66	0.62	0.60	0.56	0.55	0.67	0.64	0.61	0.59	0.55	0.54	0.52		
1.5	0.80	0.73	0.71	0.66	0.64	0.61	0.76	0.71	0.69	0.65	0.63	0.60	0.72	0.69	0.66	0.64	0.61	0.60	0.57		
2.0	0.89	0.81	0.81	0.75	0.75	0.70	0.84	0.78	0.78	0.73	0.73	0.69	0.80	0.76	0.75	0.72	0.70	0.68	0.66		
2.5	0.95	0.85	0.88	0.80	0.82	0.76	0.90	0.83	0.84	0.79	0.79	0.75	0.85	0.81	0.80	0.77	0.76	0.74	0.71		
3.0	0.99	0.88	0.93	0.84	0.87	0.80	0.94	0.86	0.88	0.82	0.84	0.79	0.89	0.84	0.84	0.81	0.81	0.78	0.75		
4.0	1.05	0.93	0.99	0.89	0.95	0.85	0.99	0.90	0.94	0.87	0.90	0.84	0.93	0.88	0.90	0.85	0.86	0.83	0.80		
5.0	1.09	0.95	1.04	0.92	1.00	0.89	1.02	0.93	0.98	0.90	0.95	0.88	0.96	0.91	0.93	0.89	0.91	0.87	0.84		
10.0	1.17	1.01	1.14	0.99	1.11	0.98	1.09	0.99	1.07	0.97	1.05	0.96	1.02	0.96	1.01	0.95	0.99	0.94	0.91		

配光曲線

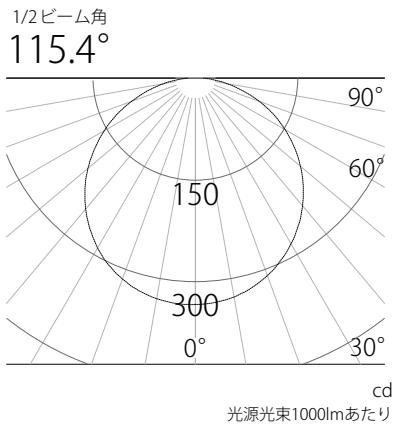

水平面照度

