

姿図




品番	GSP002DBL2-2 (36度配光)
光源	LED
定格光束	901lm
1/2 照度角	35.4°
ビーム角	35.9°

器具効率 100%	上方光束 0%	下方光束 100%	保守率 100%
-----------	---------	-----------	----------

照明率表

反射率	天井		70%						50%						30%						0%	
	壁	床	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%	
			30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%	
0.6	0.85	0.81	0.80	0.78	0.77	0.75	0.84	0.80	0.79	0.77	0.76	0.75	0.82	0.80	0.79	0.77	0.76	0.75	0.74	0.74	0.74	
0.8	0.92	0.87	0.87	0.84	0.84	0.82	0.90	0.86	0.86	0.84	0.83	0.82	0.89	0.86	0.85	0.83	0.82	0.81	0.80	0.80	0.80	
1.0	0.97	0.91	0.92	0.88	0.89	0.86	0.95	0.90	0.91	0.87	0.88	0.86	0.93	0.89	0.89	0.87	0.86	0.85	0.84	0.84	0.84	
1.25	1.00	0.93	0.95	0.90	0.91	0.88	0.97	0.91	0.93	0.89	0.90	0.87	0.94	0.90	0.91	0.88	0.88	0.87	0.85	0.85	0.85	
1.5	1.02	0.93	0.97	0.91	0.93	0.88	0.98	0.92	0.94	0.90	0.91	0.88	0.95	0.91	0.92	0.89	0.89	0.87	0.86	0.86	0.86	
2.0	1.06	0.96	1.02	0.94	0.98	0.92	1.02	0.95	0.98	0.93	0.95	0.91	0.98	0.94	0.95	0.92	0.93	0.90	0.89	0.89	0.89	
2.5	1.09	0.98	1.05	0.96	1.02	0.94	1.04	0.97	1.01	0.95	0.98	0.93	1.00	0.95	0.98	0.94	0.95	0.92	0.90	0.90	0.90	
3.0	1.12	1.00	1.08	0.98	1.05	0.96	1.06	0.98	1.03	0.96	1.01	0.95	1.02	0.96	0.99	0.95	0.97	0.94	0.92	0.92	0.92	
4.0	1.17	1.03	1.14	1.02	1.12	1.01	1.11	1.01	1.09	1.01	1.07	1.00	1.05	1.00	1.04	0.99	1.03	0.98	0.96	0.96	0.96	
5.0	1.18	1.04	1.16	1.03	1.14	1.02	1.12	1.02	1.10	1.01	1.08	1.00	1.06	1.00	1.05	0.99	1.03	0.99	0.96	0.96	0.96	
10.0	1.23	1.06	1.22	1.06	1.21	1.06	1.15	1.04	1.15	1.04	1.14	1.04	1.09	1.02	1.08	1.02	1.08	1.02	0.99	0.99	0.99	

配光曲線

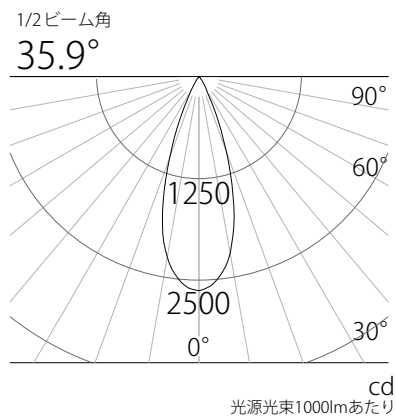

水平面照度

