

姿図




品番	GCL021B-L
光源	LED
定格光束	307lm
1/2 照度角	32°
ビーム角	32.3°

器具効率 100%	上方光束 0%	下方光束 100%	保守率 100%
-----------	---------	-----------	----------

照明率表

反射率	天井	70%						50%						30%						0%	
		50%		30%		10%		50%		30%		10%		50%		30%		10%		0%	
		30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%	
	壁																				
	床																				
	0.6	0.78	0.74	0.72	0.70	0.68	0.67	0.76	0.73	0.71	0.70	0.68	0.67	0.75	0.73	0.71	0.69	0.67	0.67	0.66	0.66
	0.8	0.86	0.81	0.80	0.77	0.76	0.74	0.84	0.80	0.79	0.77	0.75	0.74	0.82	0.79	0.78	0.76	0.75	0.74	0.73	0.73
	1.0	0.92	0.86	0.86	0.82	0.82	0.79	0.89	0.85	0.84	0.81	0.81	0.79	0.87	0.84	0.83	0.81	0.80	0.79	0.77	0.77
	1.25	0.96	0.89	0.90	0.85	0.86	0.82	0.93	0.87	0.88	0.84	0.84	0.82	0.90	0.86	0.86	0.83	0.83	0.81	0.80	0.80
	1.5	0.98	0.90	0.93	0.87	0.88	0.84	0.95	0.89	0.90	0.86	0.86	0.83	0.92	0.88	0.88	0.85	0.85	0.83	0.81	0.81
	2.0	1.04	0.94	0.99	0.91	0.95	0.89	1.00	0.93	0.95	0.90	0.92	0.88	0.96	0.91	0.92	0.89	0.90	0.87	0.85	0.85
	2.5	1.08	0.97	1.03	0.94	0.99	0.92	1.03	0.95	0.99	0.93	0.96	0.91	0.98	0.93	0.95	0.91	0.93	0.90	0.88	0.88
	3.0	1.10	0.98	1.06	0.96	1.03	0.94	1.05	0.97	1.02	0.95	0.99	0.93	1.00	0.95	0.97	0.93	0.95	0.92	0.90	0.90
	4.0	1.16	1.02	1.12	1.01	1.10	0.99	1.09	1.00	1.07	0.99	1.05	0.98	1.04	0.98	1.02	0.97	1.01	0.96	0.94	0.94
	5.0	1.17	1.03	1.15	1.02	1.12	1.00	1.11	1.01	1.09	1.00	1.07	0.99	1.05	0.99	1.03	0.98	1.02	0.97	0.95	0.95
	10.0	1.23	1.06	1.21	1.06	1.20	1.05	1.15	1.04	1.14	1.04	1.13	1.03	1.08	1.02	1.08	1.02	1.07	1.01	0.99	0.99

配光曲線

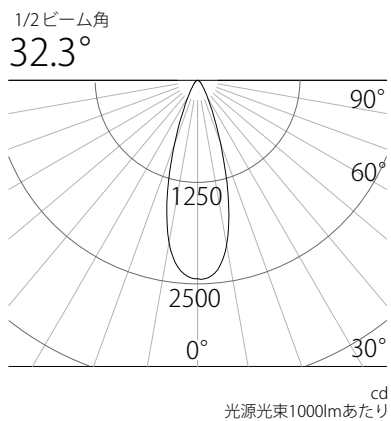

水平面照度

