

MotoM

姿図




品番	MBK048[B・W]
光源	LED
定格光束	180lm
1/2 照度角	20°
ビーム角	20°

器具効率 73%	上方光束 0%	下方光束 100%	保守率 1.0
----------	---------	-----------	---------

照明率表

天井	70%				50%				30%				0%						
	50%		30%		10%		50%		30%		10%		50%		30%		10%		0%
壁	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	30%	10%	0%
0.6	0.66	0.63	0.63	0.61	0.61	0.60	0.65	0.63	0.62	0.61	0.60	0.60	0.64	0.62	0.62	0.61	0.60	0.59	0.59
0.8	0.71	0.67	0.67	0.65	0.65	0.63	0.69	0.66	0.66	0.64	0.64	0.63	0.68	0.66	0.66	0.64	0.64	0.63	0.62
1.0	0.73	0.69	0.70	0.67	0.68	0.66	0.72	0.68	0.69	0.66	0.67	0.65	0.70	0.67	0.68	0.66	0.66	0.65	0.64
1.25	0.75	0.69	0.71	0.67	0.69	0.66	0.73	0.68	0.70	0.67	0.67	0.65	0.71	0.68	0.68	0.66	0.66	0.65	0.64
1.5	0.75	0.69	0.72	0.67	0.69	0.66	0.73	0.68	0.70	0.67	0.68	0.65	0.71	0.67	0.68	0.66	0.66	0.65	0.64
2.0	0.79	0.71	0.75	0.69	0.73	0.68	0.75	0.70	0.73	0.69	0.71	0.67	0.73	0.69	0.70	0.68	0.69	0.67	0.65
2.5	0.81	0.72	0.78	0.71	0.75	0.70	0.77	0.71	0.75	0.70	0.73	0.69	0.74	0.70	0.72	0.69	0.70	0.68	0.67
3.0	0.83	0.74	0.80	0.72	0.77	0.71	0.79	0.72	0.76	0.71	0.75	0.70	0.75	0.71	0.73	0.70	0.72	0.69	0.68
4.0	0.87	0.77	0.85	0.76	0.83	0.75	0.82	0.75	0.81	0.75	0.80	0.74	0.78	0.74	0.77	0.74	0.76	0.73	0.72
5.0	0.88	0.77	0.86	0.76	0.84	0.76	0.83	0.75	0.82	0.75	0.80	0.74	0.78	0.74	0.78	0.74	0.77	0.73	0.72
10.0	0.91	0.79	0.91	0.79	0.90	0.79	0.86	0.77	0.85	0.77	0.85	0.78	0.81	0.76	0.81	0.76	0.80	0.76	0.74

配光曲線

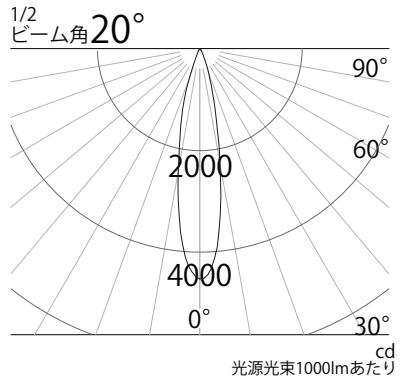

水平面照度

